



Features

- Excellent color rendering (94+ CRI)
- RGBW color mixing capability
- Up to 370 lumens per foot performance
- Consumes up to 4.6 watts per foot
- Cuttable every 6.56"
- 22 foot max run
- (IP54) unjacketed or (IP65) jacketed versions
- 50,000 hours rated life

Available CCT



RGBW

Control Options

- Trulux RGB+WW Controls
- Requires Adaptive Driver + Trulux Receiver
- Trulux DMX Controls
- Requires Adaptive Driver + Trulux DMX Receiver
- Auxiliary DMX Controls
- Requires Adaptive Driver + Trulux DMX Receiver

Listing / Ratings




TRULUX™ RGBW - 24V

Alternating 3-in-1 LEDs with 3000K warm white LEDs provide a dynamic color range that extends passed traditional RGB. RGBW lighting combines RGB with white color mixing to create millions of color possibilities while maintaining even greater brightness and overall color saturation.

Technical Information

Series	HTL-RGBW / HTL65-RGBW
Input Voltage	24V
CCT	RGB
CRI	94+
Wattage	up to 4.6W per ft
Lumens	up to 370Lm per ft
Max Run	22 feet
Cuttable	Every 6.56"
IP Rating	IP54 (unjacketed) / IP65 (jacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

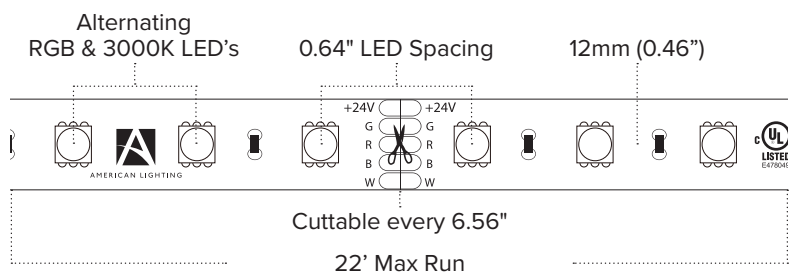



RGB + 3000K Warm White
up to 4.6W per ft / up to 370Lm per ft

16.4ft Reels



HTL-RGBW (16.4ft)



HTL65-RGBW (16.4ft)

Custom Cut




HTL-RGBW-CC

HTL-RGBW (IP54) 16.4ft Reels include: Attached 3ft lead wires / (3) Standard Power Connectors
HTL65-RGBW (IP65) 16.4ft Reels include: (1) Male (1) Female connectors / (15) Mounting Clips
Custom Cut: Please allow up to 2-4 weeks for custom cut order processing and delivery

Building an RGBW Trulux System?

See pages (48-49) for compatible RGBW Trulux controllers & accessories


Trulux RGBW Accessories



HD Power Feed (IP54)
TL-5PWR-HD



HD Splice (IP54)
TL-5SPL-HD



HD Linking Cable (IP54)
TL-5JUMP6-HD (6")
TL-5JUMP24-HD (24")



Linking Cables (IP65)
TL-5JUMP65-.5 (6")
TL-5JUMP65-1 (12")
TL-5JUMP65-2 (24")

Trulux RGBW Control



3 Zone Touch Plate
RF Wall Controller
RF-RGBW-3Z



8 Zone Remote
RF Remote Control
RF-RGBW-3AAA



Trulux RF Receiver
(Required per zone)
REC-5A-4Z




3 Zone Touch Plate
DMX Wall Controller
DMX-3Z



Trulux DMX Receiver
(Required per zone)
REC-DMX-5A-4Z

Trulux RGBW Controller Set-up



RGBW Controller
(3 zone)



Adaptive LED Driver
(30W / 60W / 96W / 192W / 288W)



Trulux RF Receiver
(Required per zone)



Trulux Tape Light